


NEVE UP


Designed for you
Not just in white

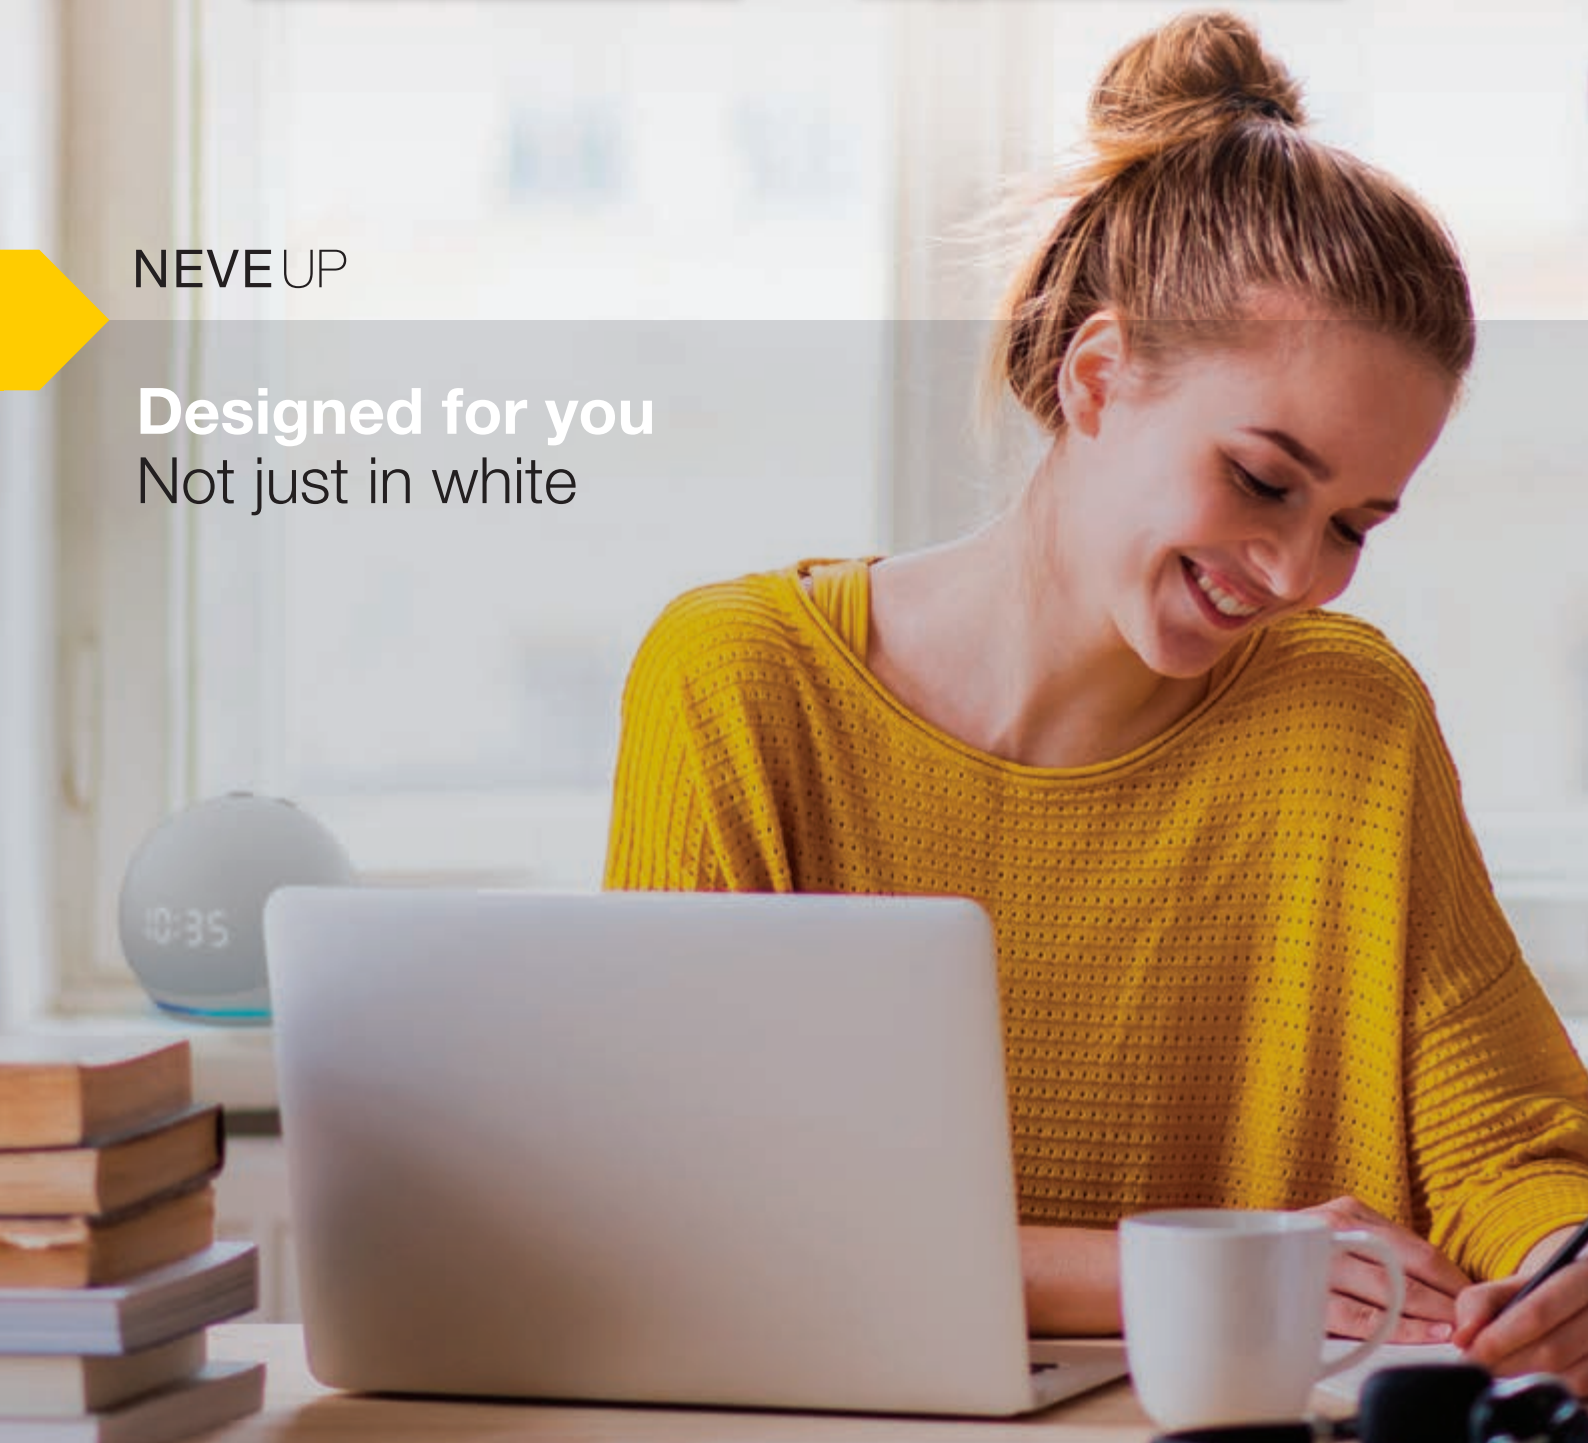

**It's also
smart**

NEVE UP.

A good choice for any residential, hospitality and office spaces.

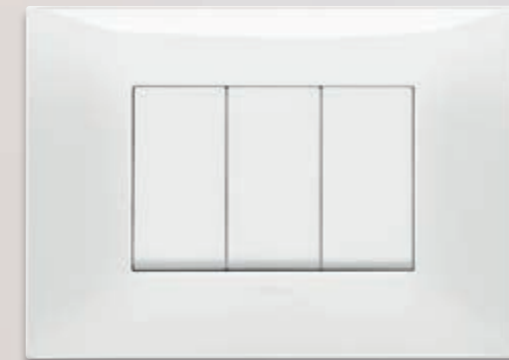

- > Simple lines, modern shape
- > Affordable quality with Italian design
- > Versatile and modular range
- > Renovations, upgrades, new buildings
- > New opportunities. It's up to you




NEVE UP. A new recognizable design.
to guarantee full functionality, quality, security
and easy installation.



Soft curved surfaces

Design details

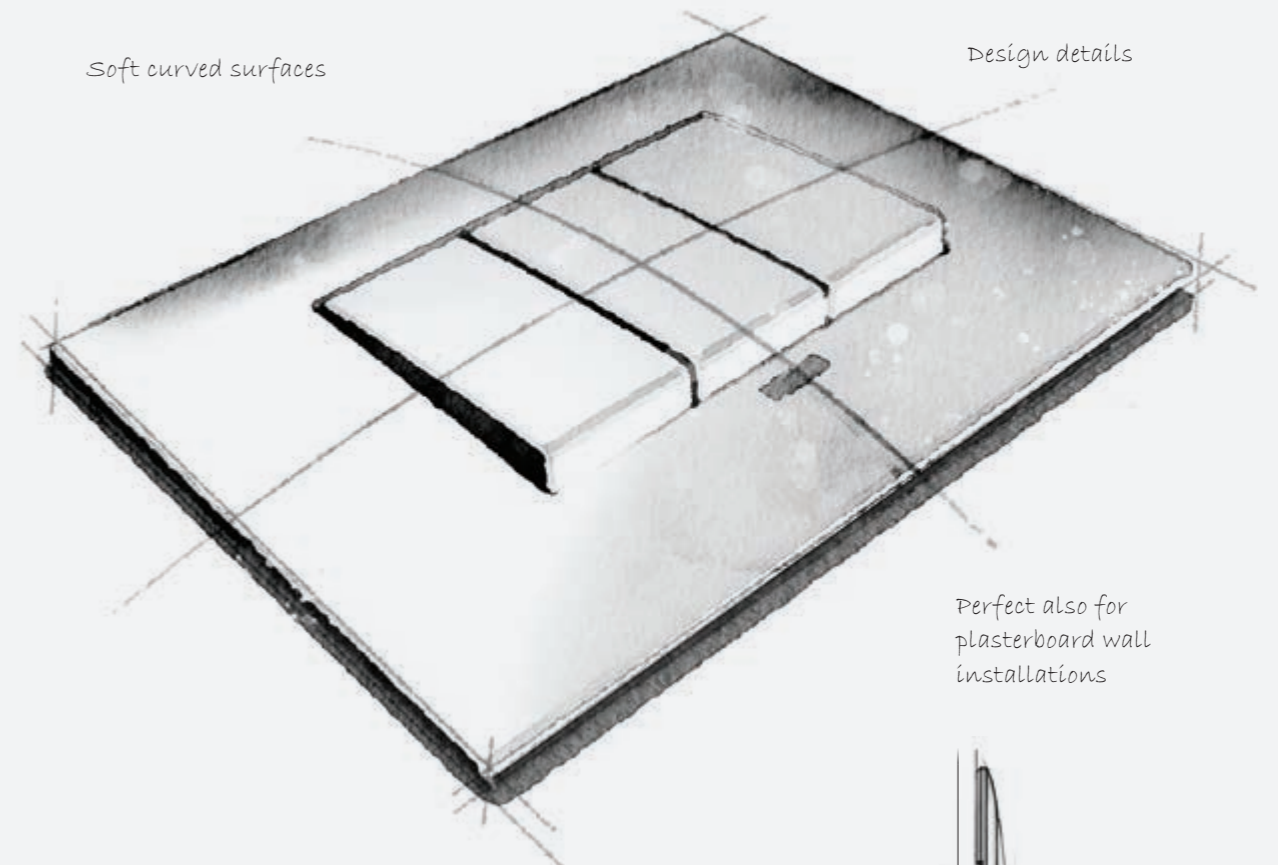

*Perfect also for
plasterboard wall
installations*

Simple geometric forms



NEVE UP

NEVE UP. Black or white?



We have designed a comprehensive system that allows you, with the flexibility of its modular system, to have more opportunities to create or upgrade your best-fit electric installation.

Choose the Total Look style



Total Look - White
Total Look - Carbon matt

A unique style, total look in white and black of the carbon matt colour switches, all perfectly coordinated. Same colour for cover plates and switches.



NEVE UP is bright white
but not only white!

NEVE UP has **new finishes**: from **glossy** basics to **matt** and **metal**. **12 finishes** to combine to the white and carbon matt switches.



Glossy technopolymer



White (Total Look)



Ivory



Slate grey



Black

Matt painted technopolymer



Matt white



Matt dove grey



Matt clay



Carbon matt (Total Look)

Metal metallic painted technopolymer



Matt silver



Matt nickel



Matt titanium



Matt copper


Glossy technopolymer



White (Total Look)



Slate grey

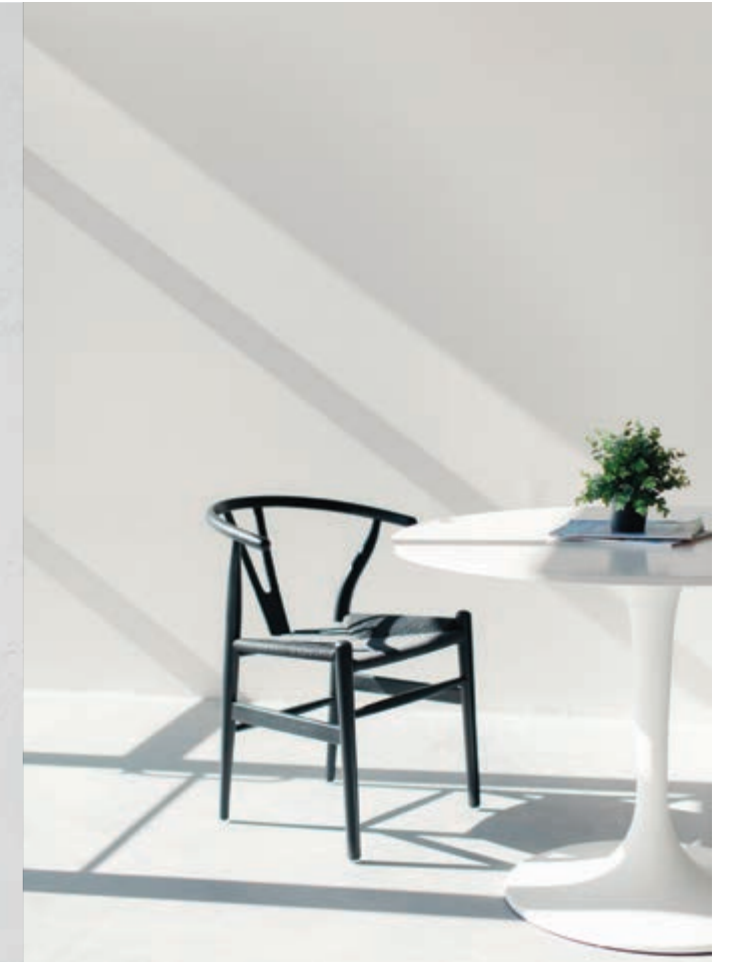


Ivory




Black

Matt painted technopolymer

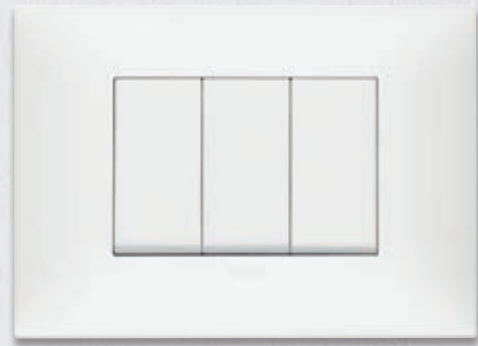


Matt white

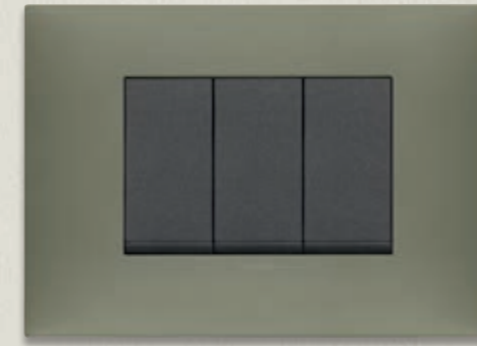

Matt clay




Matt dove grey

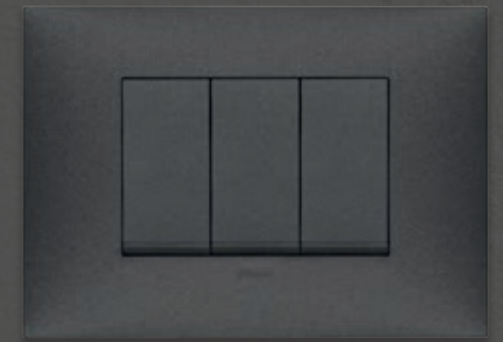

Carbon matt (Total Look)


Metal metallic painted technopolymer

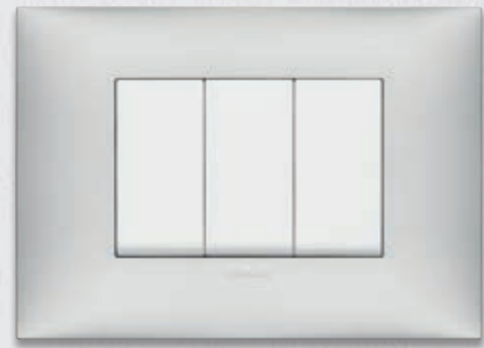

Matt silver



Matt titanium

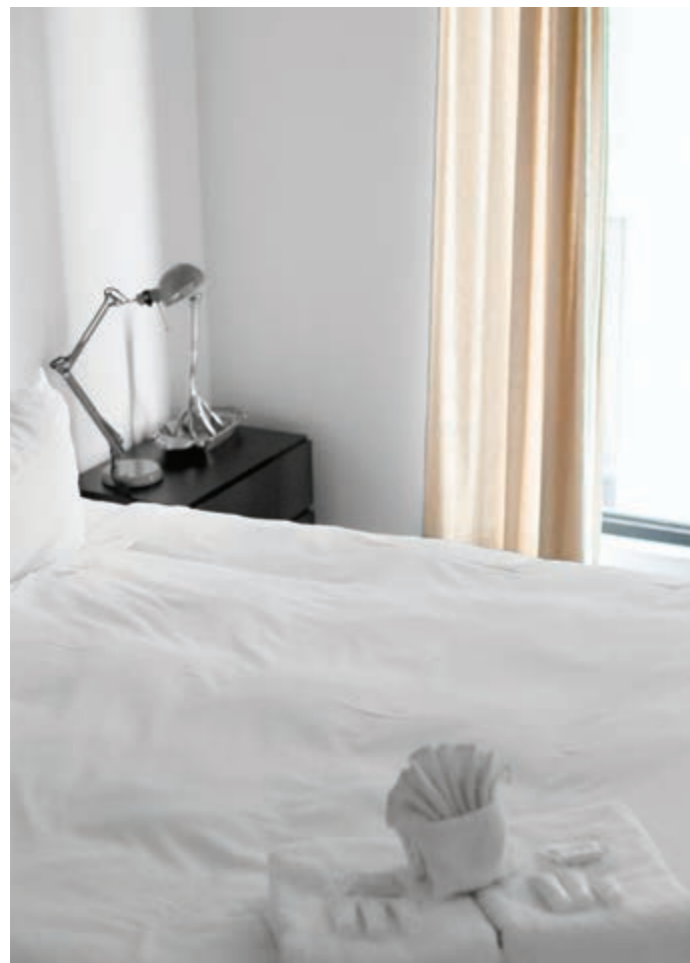

Matt nickel



Matt copper




NEVE UP. New enriched versatile range & multistandard.


We have redesigned NEVE UP to accommodate the various requirements in various different countries: an extensive and versatile range of devices in all international standards, available for both Italian/US and French/German standards.

Modular and multi-modular solutions (Italian/US standards)


Thanks to the different modularity of the devices: 1, 2 or 3 modules to install them up to 7 modules cover plates.




3 blank modules




1 central module




2 separate modules




2 central modules



3 modules




4 modules

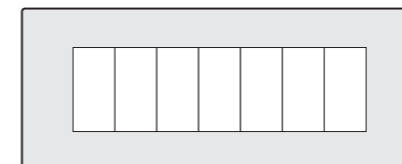


7 modules

Multigang solutions (French/German standards)


Multi-module cover plates even with dedicated distance between centres of the French/German standard installations.




1 central module




2 modules



2+2 modules

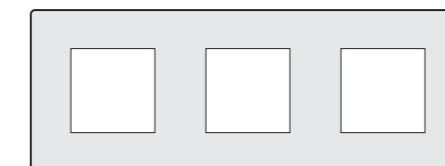

2+2+2 modules

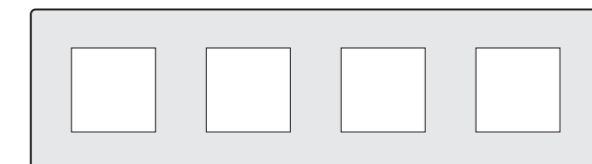

2+2+2+2 modules



NEVE UP. Easy tips for an advanced and connected smart installation.

Easy installation in just a few steps.

If you have to build or renovate an area of the home or an entire dwelling, store, restaurant, office and in those situations where masonry work and repainting tasks need to be kept to a minimum. Enhance the value of the property and improving life for those who live there.






Thanks to the wireless connectivity, you can control and manage lights, roller shutters, room temperature and energy consumption levels, simply from your smartphone or naturally using your voice directly.

NEVE UP is also smart. Spaces simply become connected

Traditional electrical systems become smart: update, extend or replace your wiring system. Simply replace traditional switches in the existing system with new connected devices by Vimar and power them: 2-way switches, roller shutter and curtain actuators, actuators for connected socket outlets, equipped with Bluetooth® wireless technology and Zigbee®. **View Wireless is ideal for new buildings, renovations or for boosting the functions of an existing system** and it is a useful means of support for the elderly and people with restricted mobility.

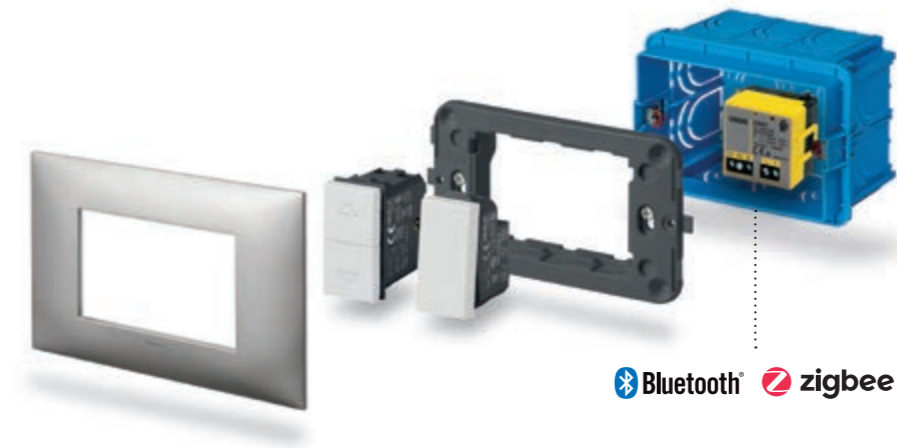


RELAY MODULE WITH DOUBLE TECHNOLOGY

- for the control of all types of lights;
- for roller shutters and blinds (even with slat orientation).



GATEWAY FOR DIN RAIL
The Bluetooth® wireless technology enables to use the device in mesh system where the gateway permits the system control by the user via View app, locally or remote control and integrate it with all the main voice assistants via cloud: Siri, Amazon Alexa and Google Home.

Now with **SMARTPHONE** and **VOICE CONTROL** you can keep everything under control

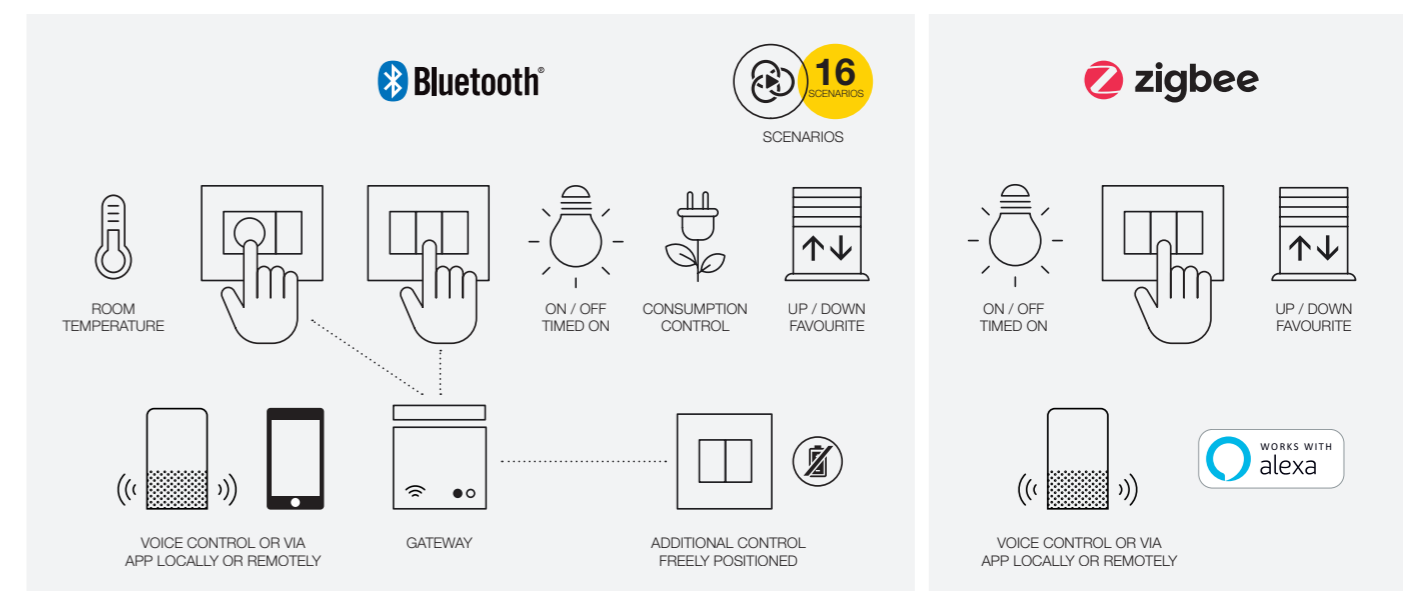




NEVE UP thermostat.

It's smart and simple to control the temperature of your spaces.

Connected dial operated thermostat for management of the room temperature, it integrate the control of lighting, roller shutters and manage the consumptions, even in remote control by View app or by voice control. Sleek design in a super-easy-to-use thermostat, a dial to adjust the temperature, 4 preset button for ON/OFF, °C/°F, summer/winter mode selection and display brightness adjustment.

- Available in black and white version.
- Intuitive, minimal and modern interface with backlit LED display.
- Convenient predefined rapid: ON/OFF, change of unit of measure, brightness adjustment, summer/winter change or programmable command.
- Without the need for a connection to a network, a **stand alone** version is also available.

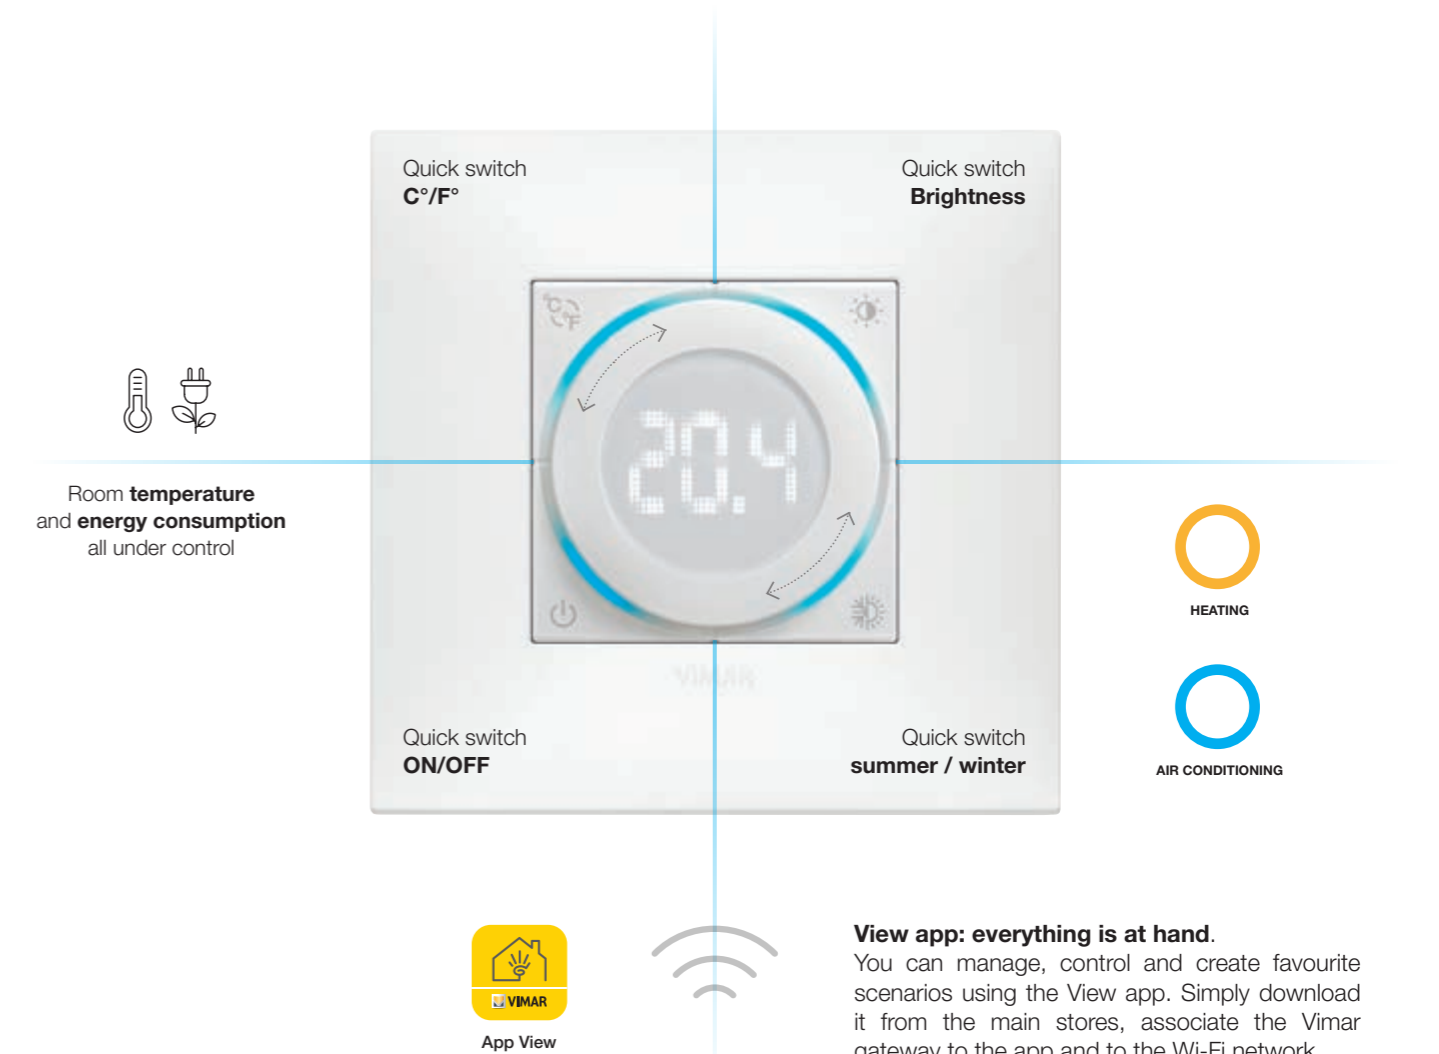




NEVE UP with QUID.

Innovative for controlling lights and rolling shutters

Our expertise dedicated to traditional systems brings to life an innovative with easy and intuitive installation that evolves wired systems for maximum functionality and reliability. A simple solution for the control of lighting and roller shutters, ideal at the doorway, on the bedhead of a hotel, in commercial areas, homes and working places.

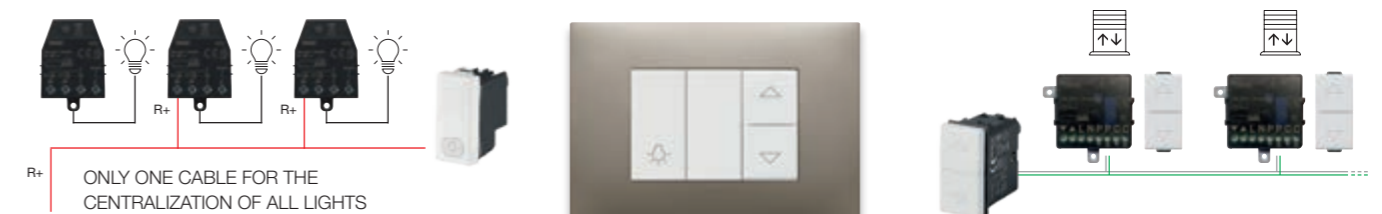

quid+

QUID for lights. Innovative and silent magnetic relay.

Central control. QUID offers the possibility of realizing a centralized shutdown control. It gives the opportunity of shutting down all lights with just a gesture. Furthermore, the presence of a pilot light reveals if the lighting is active in any other connected point.

Silent. Differently from the standard electromechanical devices, the change of status turns out to be more silent, thanks to Vimar patented magnetic relay.

Safe. If the push button remains active, the relay does not overheat because there is no electricity after the change of status.

Energy saving. It does not consume energy with the lights off for energy saving and respect for environment

QUID for roller shutters. Innovative electronic switch.

Centralized control. The new switch, on wired systems, supports the possibility of automating curtains or roller shutters and enabling group control, with disconnection of the load at the end and memorizes the favourite position.

Reliable and safe. It switches off the power at the end to avoid the motor to be in voltage and to be damaged.

PATENTED
VIMAR



Easy and comfortable solutions for the home and the office.

STAND ALONE THERMOSTAT

Dial operated thermostat, a sleek design in a super-easy-to-use thermostat. A dial to adjust the temperature, 4 preset button for ON/OFF selection, °C/°F adjustment, summer/winter mode selection and display luminosity adjustment.



USB SOCKET OUTLETS

The type A USB charger has now been supplemented with the type C one, the new technological standard used to power and charge latest-generation devices. Ideal in hotel rooms and offices.




UNIVERSAL DIMMER

2-wire universal dimmer to control and adjust all types of load, LED and CFL included, with minimum intensity adjustment to avoid flickering of the lamp.



EMERGENCY LAMP

The emergency lamp comes on in the event of a blackout to guide you safely in the dark.

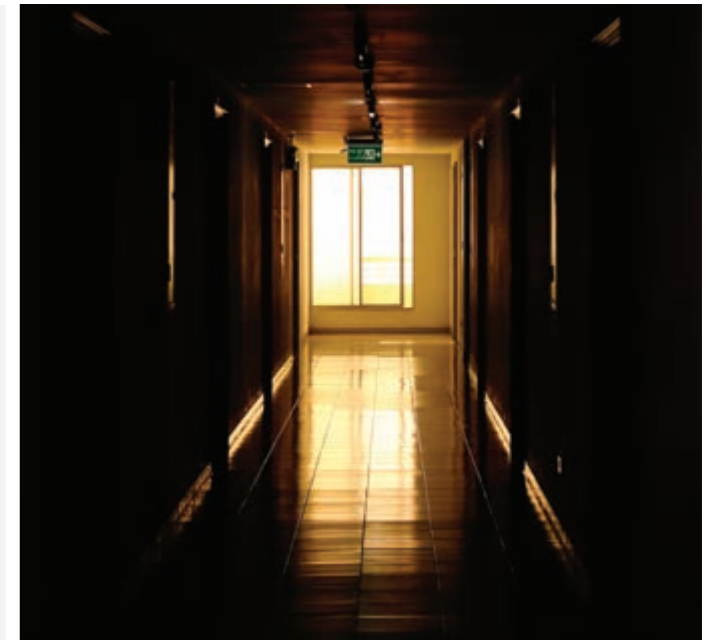

INFRARED 1-WAY SWITCH

Without touching the 1-way switches with your hands, the infrared motion sensor 1-way switch turns the lights on and off only at night when someone passes by. Ideal for optimising electricity consumption levels and to avoid contact with the lighting device.



Easy and comfortable solutions **for hospitality.**

THE BEST TEMPERATURE EVERYWHERE

The optimum climate control by means the programmation of the 7 days per week temperature, it is very easy and a clear display helps you to change the setting anytime and even from smartphone and tablet.



TRANSPONDER CARD SWITCH

This switch, placed inside the room of a B&B or a small hotel, activates all services when the guest is present.



SHAVER SUPPLY UNIT AND CORD OPERATED PUSH BUTTON

In B&B or in a small hotel, they have to be installed, the shaver supply unit with 20 VA isolating transformer, for electric razors supply of 230 V and 120 V and for the safety of the guests a cord-operated push button in the bathroom.



SPECIAL PUSH BUTTONS

The Do Not Disturb and Please Clean push buttons facilitate the communication between guest and service staff of the hotel, for the guest comfort and quietness.



A FULL RANGE OF DATA AND POWER SOCKETS

Wide range of power sockets, from German to French standard, from Italian and American ones. Data sockets, USB data ports and TV-RD-SAT, they all guarantee fast and safe connection to a high quality standard.





NEVE UP. Opportunities for you

We are a team of professionals who provide expert support and customized global solutions for automating, connecting and monitoring the entire building while assuring total aesthetic coordination of all visible devices.



vimar.com - our on-line service platform, available 24/7. Vimar's know-how at your fingertips.

Navigate the on-line catalogue, a detailed database of all our codes with technical drawings, instruction sheets, and product photos.

Go to the **download section** and choose your language:

- **Dedicated catalogues** and **brochures** of our product range, systems and solutions.
- **Video** tutorial section, also available on YouTube channel.

From the homepage go to the **News** to keep yourself updated and to **References** to see our latest **Projects**.



NEVE UP packaging solutions.

The packaging cases uses GD2 cardboard, consists of 90% recycled fibre and it is 100% recyclable. Moreover, the graphic printing is water-based and the colours are made with vegetable oils.



Catalogue section

Control devices	40
Power and signal socket outlets	43
Signalling	47
Climate	48
Hotel solutions	48
Smart home View Wireless	49
Cover plates range	50
Installation types	54


NEVE UP Free to change.

Flexible modular system installations.

Thanks to the many mounting frames available, ranging from 1 up to a maximum of 7 or 2+2+2+2 modules, control devices and socket outlets sized 1, 2, 3 modules, many solutions can be found for all installation needs. The lighting switch can be completed with the cover plate in the colour and material of your choice.



2 modules

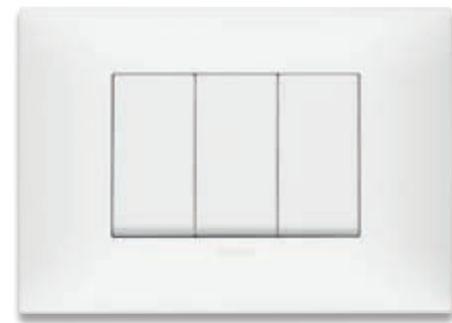


3 modules

Customization and backlighting
Backlit and customized switches are available both in white and carbon matt colours, to easily locate the switch and immediately know its function.



Modular devices
Combinations with 1, 2 and 3 module devices on 3 module mounting frames.

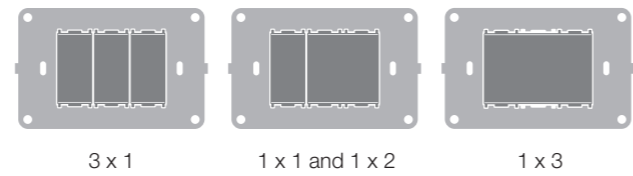


COVER PLATES + INTERCHANGEABLE SWITCHES + MOUNTING FRAME



Add and change functions over time, depending on your specific living needs.




2+2 modules

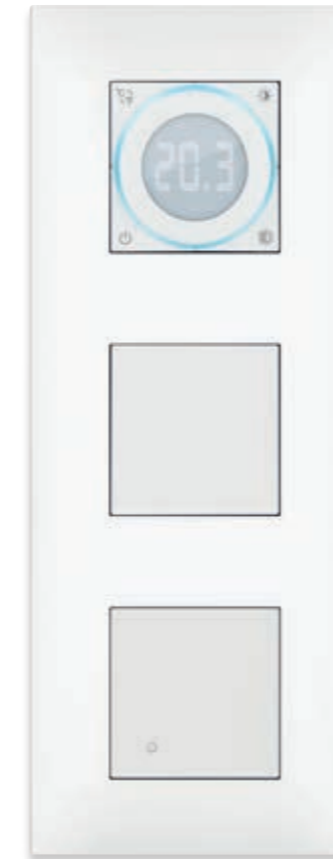


2+2+2 modules, vertical use

2+2+2 modules, horizontal use

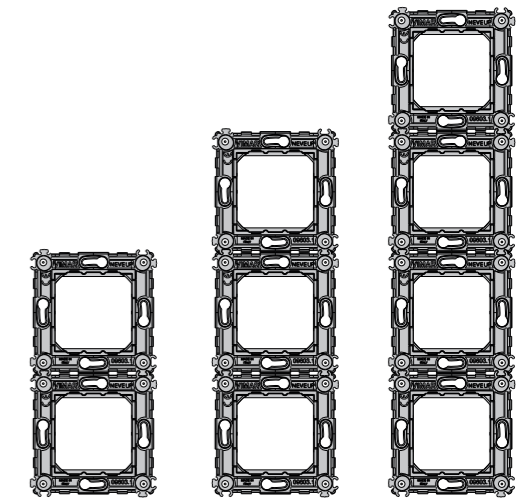

90°
Multigang switches can be used horizontally or vertically depending on specific needs of the space.

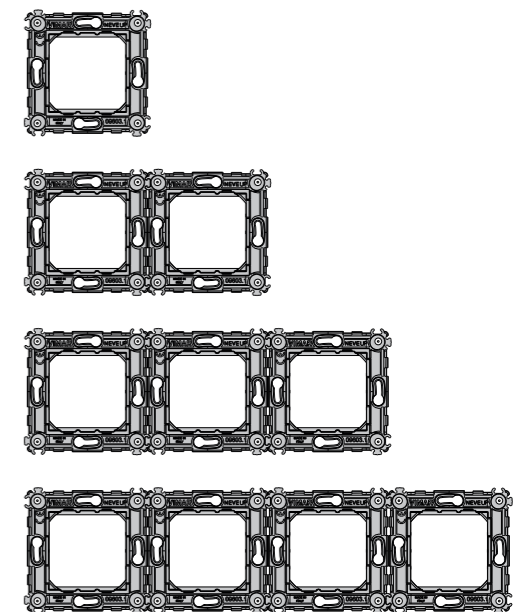

NEVE UP is quality for a quick and easy installation. We take care of every detail

Your installation, it's easy to fit.

Installation is made easier thanks to the mounting frame with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between switches to create a tidy and visually pleasing stylistic effect. The devices are fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.



Improved electrical load transmission

The use of noble metals such as silver for the terminal contacts makes the conduction of the electrical load easier, hence lowering the operating temperature of the contacts making the switch last longer.

Screw terminals

The metal plate in the terminals is curved: a Vimar refinement allowing different cross section wires to be held in place when clamped even at the same time. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².

It's easy and flexible to upgrade over time

- Front clamping system for an easy mechanism installation when the support frame is already installed on the wall
- Specially designed terminal blocks prevent the mechanism to be put under strain when the screw is overloosened, allowing a power drill to be used for tightening and loosening the screws without damaging the mechanism




Perfect alignment of buttons on the mounting frame

The stiffness of the mounting frame along with the small production tolerances provide the required dimensional accuracy to guarantee perfect aligned rockers. The special structure also makes it possible to compensate for the thickness of the mounting box for plasterboard, guaranteeing the perfect fit of the cover plate with the wall.

Perfect styling result, even on plasterboard walls

NEVE UP is the ideal on plasterboard.


The special structure of the mounting frame affords an attractive flush-fit effect, where the cover plate blends in seamlessly with the wall. In installations on plasterboard walls, it also covers the protrusion of the mounting box perfectly.

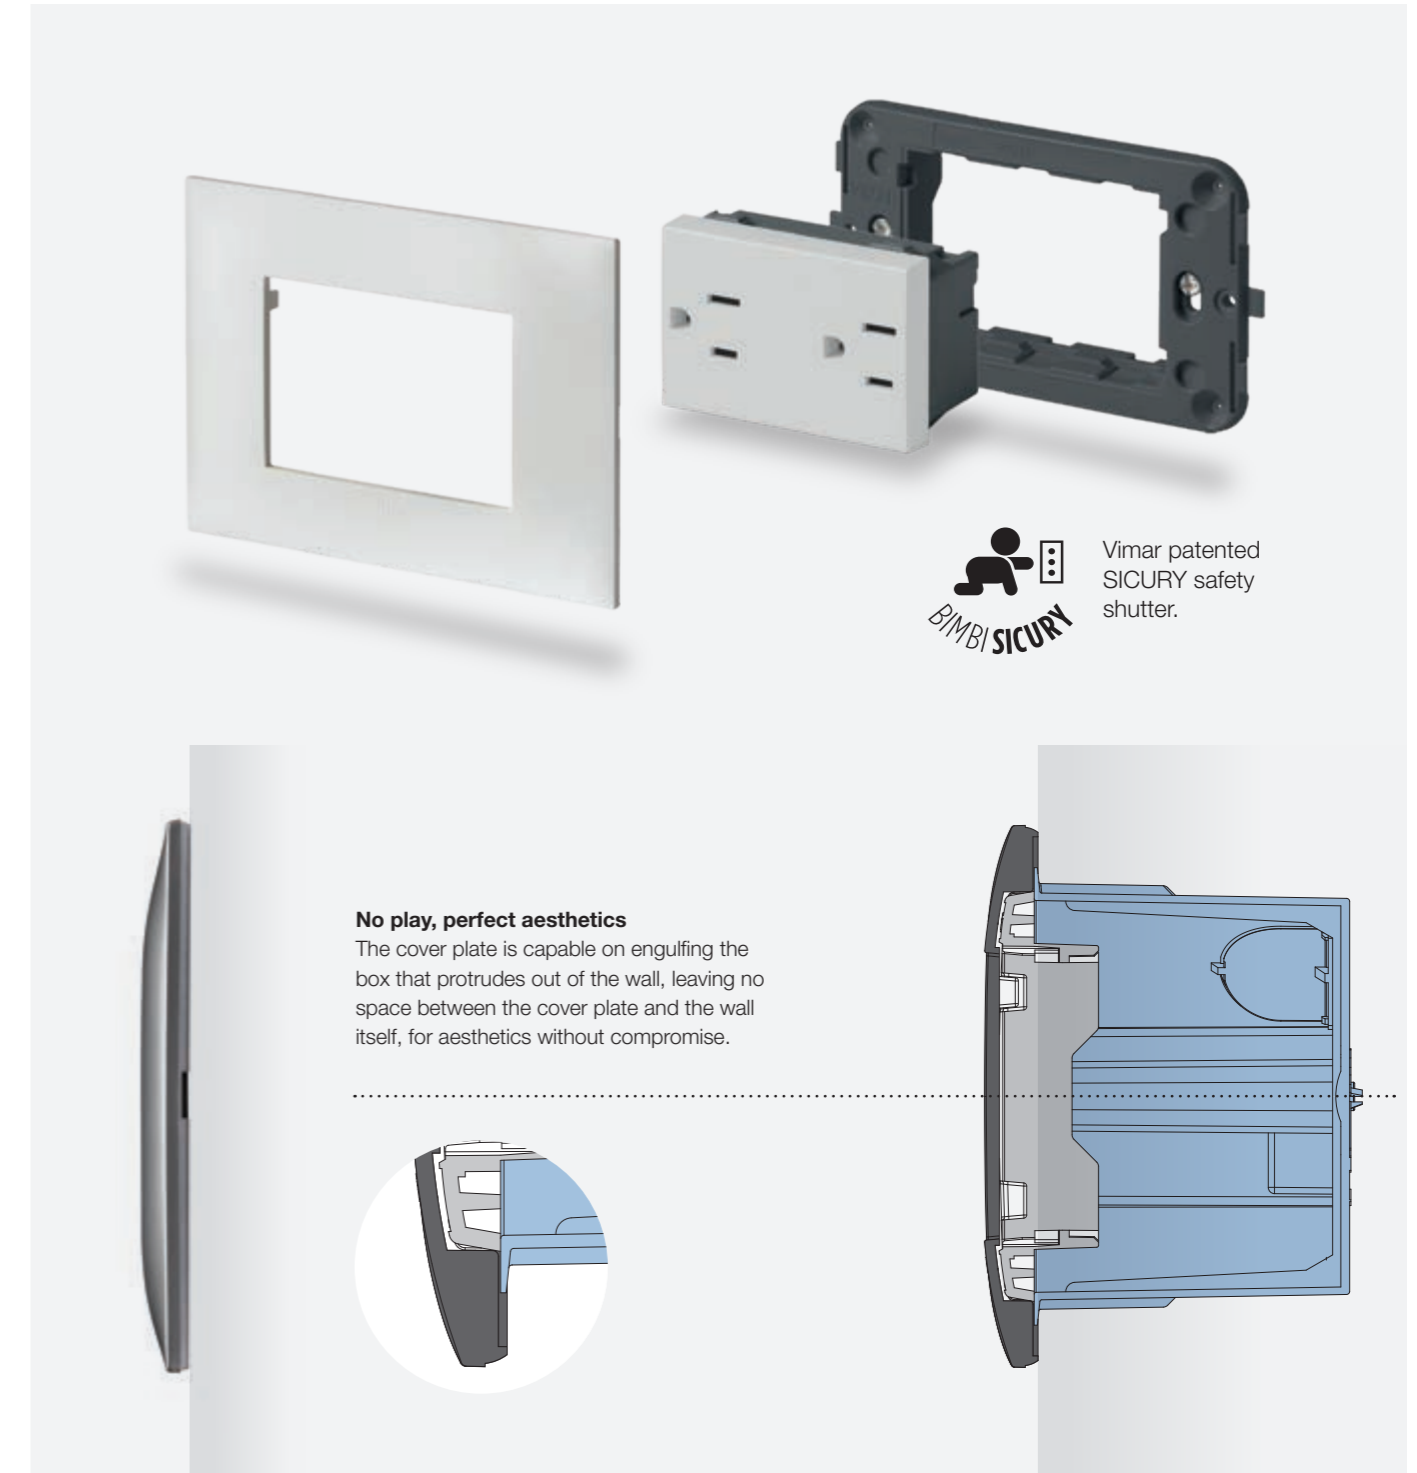


 Vimar patented SICURY safety shutter.


No play, perfect aesthetics

The cover plate is capable on engulfing the box that protrudes out of the wall, leaving no space between the cover plate and the wall itself, for aesthetics without compromise.



Mounting features


Italian and American standards

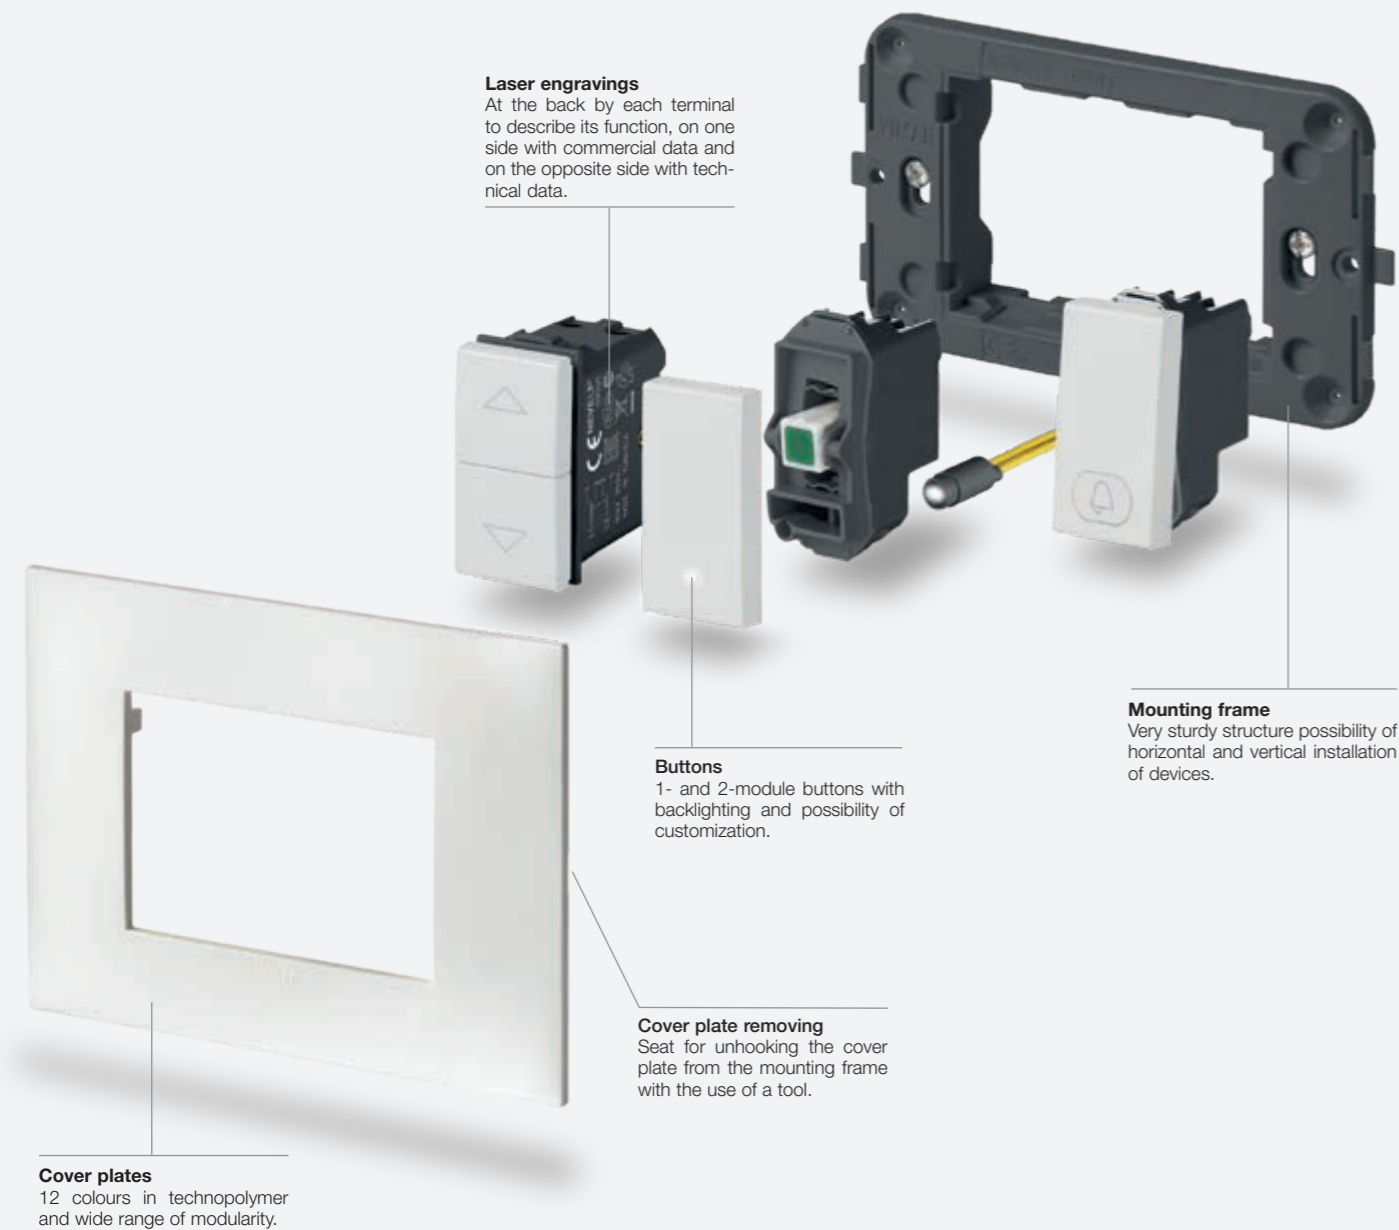

Composition	Boxes	Frames	Devices	Cover plates
 1-central module, round box 2 modules, round box	 Flush mounting	 With/without screws or with claws	 1 module 1 x 2 modules 2 x 1 module	 1-central module* 2 modules*
 2-central modules, for round or 3-module box	 Flush mounting Flush mounting	 With screws With screws	 2 modules 2 x 1 module	 2-central modules*, vertical way 2-central modules*, horizontal way
 From 1-central and 2-separate modules, for 3-module box From 3 to 7 modules	 Flush mounting	 With screws With screws With screws	 1 module 2 x 1 module 1 and 2 modules 3 x 1 module 3 modules	 1-central modules* 2-separate modules* From 3 to 7 modules* Blank module*
Plana devices installation				
 3 modules with Plana devices	 Flush mounting	 Mounting frame for Plana devices, with screws	 3 x 1 module, Plana devices	 Neve Up cover plate, 3 modules*

Mounting features

German and French standards

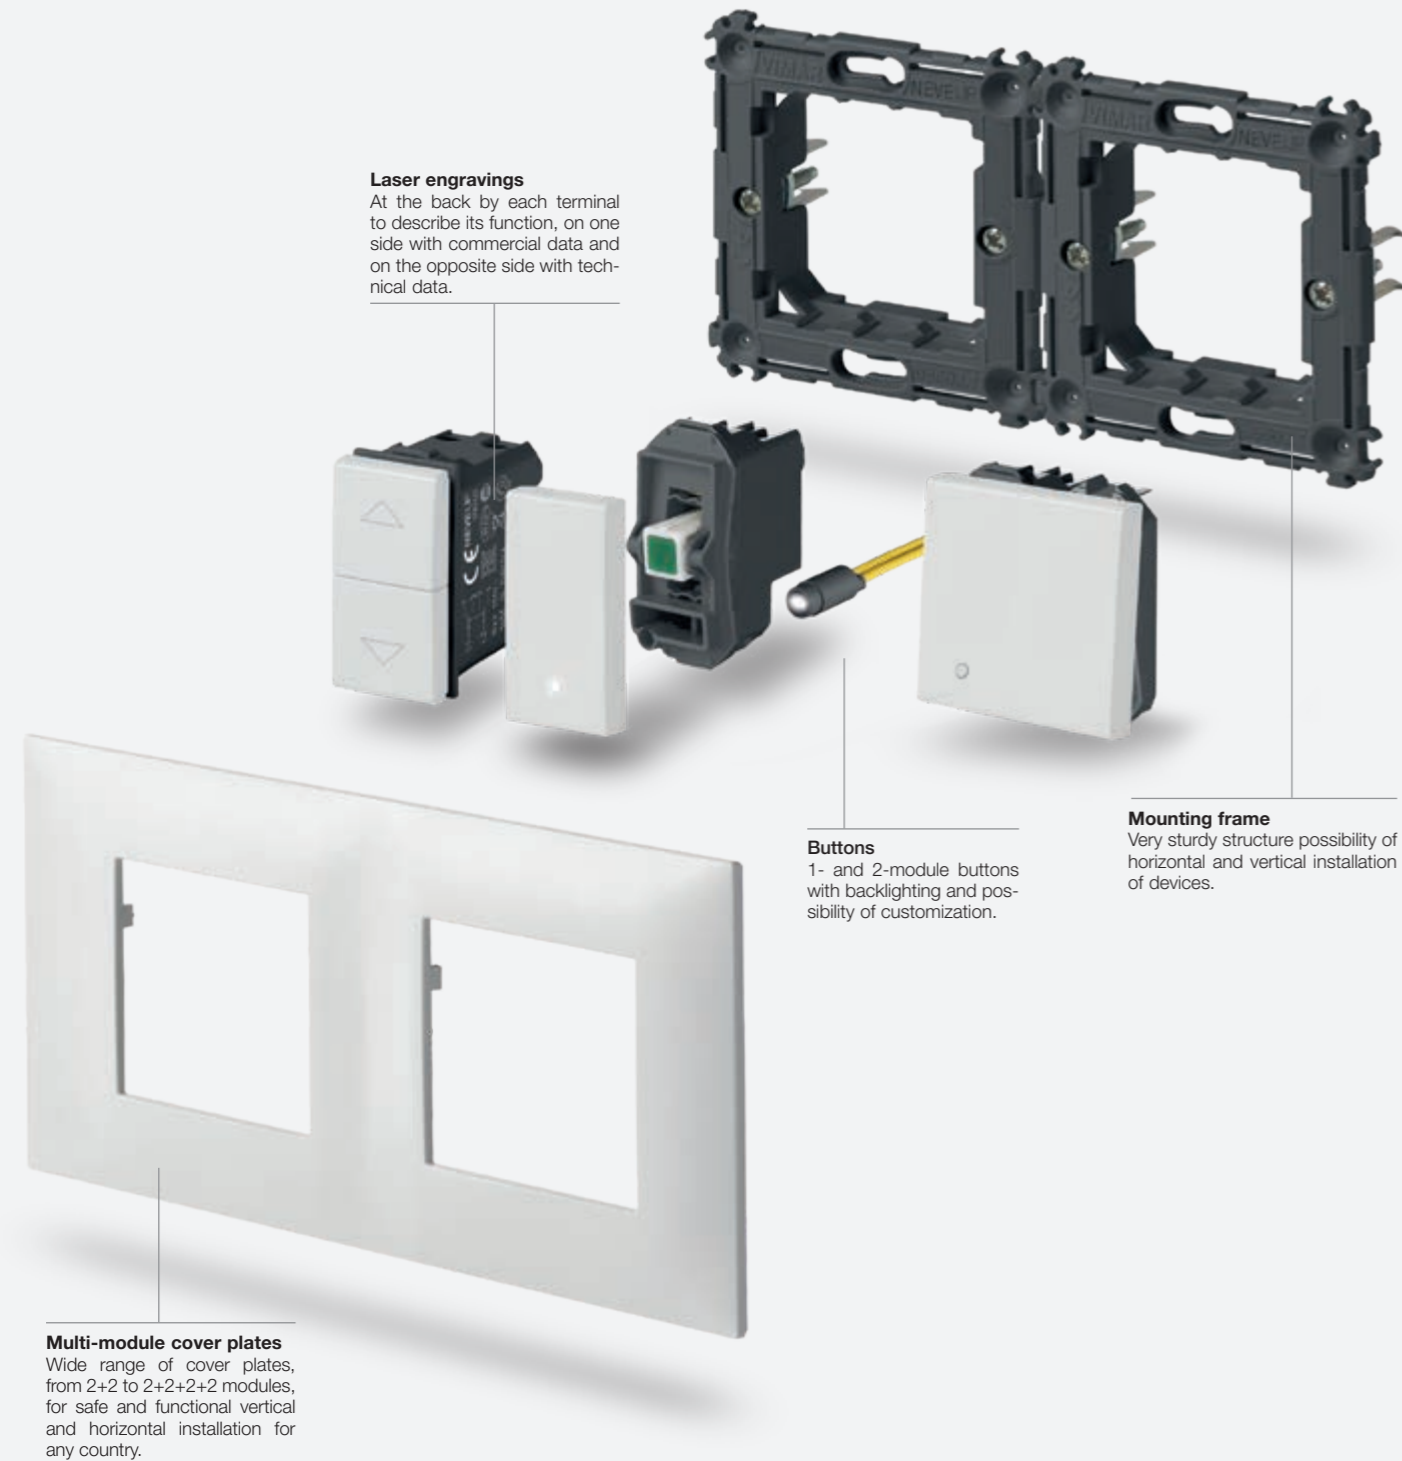

Composition	Box	Frame	Device	Cover plate
<p>2 modules, ø 60 and 65 mm mounting box</p>			<p>1-gang switch, 2 modules</p>	<p>2 modules*</p>
<p>2+2 modules, 71 mm between centres</p>			<p>2 x 2 modules in vertical</p> <p>2 x 2 modules in horizontal</p>	<p>vertical</p> <p>horizontal</p>
<p>2+2+2 modules, 71 mm between centres</p>			<p>3 x 2 modules in vertical</p> <p>3 x 2 modules in horizontal</p>	<p>vertical</p> <p>horizontal</p>
<p>2+2+2+2 modules, 71 mm between centres</p>			<p>4 x 2 modules in vertical</p> <p>4 x 2 modules in horizontal</p>	<p>vertical</p> <p>horizontal</p>

* For other combinations, see the installation types from page 56

White	Carbon Matt
-------	-------------

Blank modules and cable outlets

<p>09041 Blank module. Depth: 9 mm</p>	<p>09044 Cable outlet. Depth: 11,1 mm</p>	<p>09041.CM Blank module. Depth: 9 mm</p>	<p>09044.CM Cable outlet. Depth: 11,1 mm</p>
---	--	--	---

1P 1-way switches 250 V~

<p>09001 16 AX. Depth: 23,1 mm</p>	<p>09001.2 16 AX, - 2 modules. Depth: 23,1 mm</p>	<p>09001.CM 16 AX. Depth: 23,1 mm</p>	<p>09001.2.CM 16 AX, - 2 modules. Depth: 23,1 mm</p>
---	--	--	---

2P 1-way switches 250 V~ (lightable°)

<p>09015 16 AX. Depth: 32,7 mm</p>	<p>09015.CM 16 AX. Depth: 32,7 mm</p>
---	--

Connected actuators - backside installation

03981
Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0



1P 2-way switches 250 V~

<p>09005 16 AX. Depth: 23,1 mm</p>	<p>09005.2 16 AX, - 2 modules. Depth: 23,1 mm</p>	<p>09005.CM 16 AX. Depth: 23,1 mm</p>	<p>09005.2.CM 16 AX, - 2 modules. Depth: 23,1 mm</p>
---	--	--	---

1P reversing switches 250 V~

<p>09013 16 AX. Depth: 26,7 mm</p>	<p>09013.2 16 AX, - 2 modules. Depth: 26,7 mm</p>	<p>09013.CM 16 AX. Depth: 26,7 mm</p>	<p>09013.2.CM 16 AX, - 2 modules. Depth: 26,7 mm</p>
---	--	--	---

* Not to be used in European Countries

White	Carbon Matt
-------	-------------

1P NO push buttons 250 V~

<p>09008 10 A. Depth: 23,1 mm</p>	<p>09008.2 10 A - 2 modules. Depth: 23,1 mm</p>	<p>09008.CM 10 A. Depth: 23,1 mm</p>	<p>09008.2.CM 10 A - 2 modules. Depth: 23,1 mm</p>
--	--	---	---

Quid - Magnetic relay modules for lighting - backside installation

<p>03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output</p>	<p>03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status</p>	<p>03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs</p>
--	---	--

Backlit mechanisms° (to be used for the two colours of interchangeable buttons)

<p>09001.0.250¹ 1P 16 AX 250 V~ 1-way switch. Depth: 23,1 mm</p>	<p>09005.0.250¹ 1P 16 AX 250 V~ 2-way switch. Depth: 23,1 mm</p>	<p>09008.0.12¹ 1P NO 10 A 12 V push button. Depth: 23,1 mm</p>	<p>09008.0.250¹ 1P NO 10 A 250 V~ push button. Depth: 23,1 mm</p>
---	---	---	--

1-module interchangeable buttons

<p>09021 Not lightable</p>	<p>09021.N Neutral, lightable</p>	<p>09021.G Customizable</p>	<p>09026.DND Do Not Disturb, with diffuser, lightable</p>	<p>09021.CM Not lightable</p>	<p>09021.N.CM Neutral, lightable</p>	<p>09021.G.CM Customizable</p>	<p>09026.DND.CM Do Not Disturb, with diffuser, lightable</p>
<p>09026.PLS Please Clean, with diffuser, lightable</p>	<p>09021.C Bell symbol, lightable</p>	<p>09021.L Light symbol, lightable</p>	<p>09021.P Key symbol, lightable</p>	<p>09026.PLS.CM Please Clean, with diffuser, lightable</p>	<p>09021.C.CM Bell symbol, lightable</p>	<p>09021.L.CM Light symbol, lightable</p>	<p>09021.P.CM Key symbol, lightable</p>
<p>09021.F Fan symbol, lightable</p>	<p>09021.H Flame symbol, lightable</p>	<p>09021.S Switch ON symbol, lightable</p>		<p>09021.F.CM Fan symbol, lightable</p>	<p>09021.H.CM Flame symbol, lightable</p>	<p>09021.S.CM Switch ON symbol, lightable</p>	

2-module interchangeable buttons

<p>09022 Not lightable</p>	<p>09022.N Neutral, lightable</p>	<p>09022.CM Not lightable</p>	<p>09022.N.CM Neutral, lightable</p>
---------------------------------------	--	--	---

° Lamps and signalling units, page 49

¹ White lamp included

White Carbon Matt

1P special switches 250 V~



09052
NO 10 A,
cord-operated.
Depth: 24,7 mm



09052.CM
NO 10 A,
cord-operated.
Depth: 24,7 mm



09050
NO 10 A, with
lightable name-plate
- 2 modules.
Depth: 25,2 mm

Switches for roller blind controls 250 V~



09060
2P 10 AX 2-way
switch,
OFF-central.
Depth: 33,5 mm



09062
1P NO 10 A
2-interlocked
push buttons.
Depth: 29 mm



09060.CM
2P 10 AX 2-way
switch,
OFF-central.
Depth: 33,5 mm



09062.CM
1P NO 10 A
2-interlocked
push buttons.
Depth: 29 mm

Quid - Electronic relay modules and control unit modules for roller shutters



03996
Centralizable relay module, slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backside or junction boxes installation



03997
Control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backside or junction boxes installation

Connected actuators for roller shutter - backside installation



03982
Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0



Dimmers**



09135.1
MASTER,
universal
09135.1.120
As above,
120 V~.
Depth: 41,5 mm



09153
100-500 W
push-push +
potentiometer,
230 V~.
Depth: 40 mm



***09146**
60-900 W
60-300 VA,
potentiometer,
120 V~.
Depth: 40 mm



09147
30-500 W
30-300 VA,
potentiometer,
120 V~.
Depth: 40 mm



09135.1.CM
MASTER,
universal
09135.1.120.CM
As above,
120 V~.
Depth: 41,5 mm



09153.CM
100-500 W
push-push +
potentiometer,
230 V~.
Depth: 40 mm



***09146.CM**
60-900 W
60-300 VA,
potentiometer,
120 V~.
Depth: 40 mm



09147.CM
30-500 W
30-300 VA,
potentiometer,
120 V~.
Depth: 40 mm

White Carbon Matt

Dimmer - controllable loads

Type	UNIVERSAL							
	09135.1				09135.1.120			
	2-wire connection		3-wire connection		2-wire connection		3-wire connection	
LOADS	LE	TE	LE	TE	LE	TE	LE	TE
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
Compact fluorescent lamps (CFL)	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 8 lamps	3 ÷ 200 W max 16 lamps
Electronic transformers for halogen lamps	40 ÷ 300 VA max 3 transformers type	40 ÷ 300 VA max 5 transformers type	40 ÷ 300 VA max 3 transformers type	40 ÷ 300 VA max 5 transformers type	40 ÷ 300 VA max 3 transformers type	40 ÷ 300 VA max 5 transformers type	40 ÷ 300 VA max 3 transformers type	40 ÷ 300 VA max 5 transformers type

Dimmer - controllable loads

Type	STANDARD		
	09153 (with push-push switch and rotary potentiometer control)	09146 (with rotary potentiometer)	09147 (with rotary potentiometer)
Incandescence	100 - 500 W	60 - 900 W	30 - 500 W
Ferromagnetic transformers for halogen lamps		60 - 300 VA 230 V~, 50/60 Hz	30 - 300 VA 120 V~, 50/60 Hz

Infrared switches



09181
Lighting switch, NO 6 A 230 V~
relay output, 50/60 Hz.
Depth: 37 mm



09181.CM
Lighting switch, NO 6 A 230 V~
relay output, 50/60 Hz.
Depth: 37 mm

SICURY 2P+E Italian standard socket outlets 250 V~



09201
10 A,
P11.
Depth: 23,2 mm



09203
Epresa 16 A,
P17/11.
Depth: 23,2 mm



09209
16 A, P30
- 2 modules.
Depth: 29,3 mm



09210
16 A, universal
- 2 modules.
Depth: 26,4 mm



09201.CM
10 A,
P11.
Depth: 23,2 mm



09203.CM
Epresa 16 A,
P17/11.
Depth: 23,2 mm



09209.CM
16 A, P30
- 2 modules.
Depth: 29,3 mm



09210.CM
16 A, universal
- 2 modules.
Depth: 26,4 mm

SICURY 2P+E socket outlets 250 V~ - German standard



09208
16 A, German
with cover
- 2 modules.
Depth: 29,5 mm



09208.C
16 A, German,
with cover
- 2 modules.
Depth: 29,5 mm



09208.CM
16 A, German
- 2 modules.
Depth: 29,5 mm



09208.C.CM
16 A, German,
with cover
- 2 modules.
Depth: 29,5 mm

Socket outlets

White	Carbon Matt
-------	-------------

SICURY 2P+E socket outlets 250 V~ - French standard



09212
16 A, French
- 2 modules.
Depth: 26,4 mm



09212.CM
16 A, French
- 2 modules.
Depth: 26,4 mm

Socket outlets 250 V~ - Euro-American standard



09233
2P 16 A,
Euro-American
(ø 4,8 mm).
Depth:
30 mm




09234
SICURY
2P 16 A,
Euro-American.
Depth:
30 mm



09248
SICURY 2P+E 16 A,
Euro-American
- 2 modules.
Depth: 26,5 mm



09249
Two SICURY 2P+E
16 A, Euro-American
- 3 modules.
Depth: 24,5 mm



09233.CM
2P 16 A,
Euro-American
(ø 4,8 mm).
Depth:
30 mm



09234.CM
SICURY
2P 16 A,
Euro-American.
Depth:
30 mm



09248.CM
SICURY 2P+E 16 A,
Euro-American
- 2 modules.
Depth: 26,5 mm



09249.CM
Two SICURY 2P+E
16 A, Euro-American
- 3 modules.
Depth: 24,5 mm

Socket outlets 127 V~ - USA and Arabian standard



09242
SICURY 2P+E
15 A, USA and
Arabian



09243
Two SICURY 2P+E
15 A, USA and Arabian
- 3 modules

09245
2P+E 15 A,
USA and
Arabian.
Depth:
27 mm

09246
Two 2P+E 15 A,
USA and Arabian
- 3 modules.
Depth: 26 mm



09242.CM
SICURY 2P+E
15 A, USA and
Arabian



09243.CM
Two SICURY 2P+E
15 A, USA and Arabian
- 3 modules

09245.CM
2P+E 15 A,
USA and
Arabian.
Depth:
27 mm

09246.CM
Two 2P+E 15 A,
USA and Arabian
- 3 modules.
Depth: 26 mm

SICURY 2P+E socket outlets 250 V~ - Israeli standard



09240
16 A, Israeli
- 2 modules.
Depth: 29,7 mm



09240.CM
16 A, Israeli
- 2 modules.
Depth: 29,7 mm

SICURY 2P+E socket outlets 250 V~ - Multistandard



***09257**
13 A, multistandard
- 2 modules.
Depth: 18,7 mm



***09257.CM**
13 A, multistandard
- 2 modules.
Depth: 18,7 mm

* Not to be used in European Countries

Socket outlets

White	Carbon Matt
-------	-------------

Socket outlets 2P+E 15 A 125 V~ 60 Hz - American standard



00296
Double American
standard with GFCI
- 3 modules.
Depth: 30,1 mm



00296.CM
Double American
standard with GFCI
- 3 modules.
Depth: 30,1 mm

Possible matches - Foreign standard plugs and socket outlets

SOCKET OUTLET PLUG	German	French	Euroamerican				American Saudi Arabian				Israeli	Multistandard
	09208...	09212...	09233	09234	09248	09249	09242	09245	09243	09246	09240	09257
S10 Italian standard	•	•	•	•	•	•					•	•
2P 2,5 A Europlug	•	•	•	•	•	•					•	•
2P+E 16 A 250 V~ German standard	•		○	○	○	○					○	○
2P+E 16 A 250 V~ German and French standards	•	•	○	○	○	○					○	
2P 16 A 250 V~ German and French standards	•	•	•	•	•	•					•	
2P+E 16 A 250 V~ French standard		•	○	○	○	○					○	
2P+E 10 A 250 V~ Swiss standard												•
2P+E 16 A 250 V~ Israeli standard											•	
2P+E 5 A 250 V~ English standard												•
2P+E 13 A 250 V~ English standard												•
2P+E 15 A 125 V~ American standard					•	•	•	•	•	•		
2P 15 A 127 V~ American and Saudi Arabian standards							•	•	•	•		
2P+E 10 A 250 V~ Brazilian standard												•
2P+E 10 A 250 V~ Chinese standard												•
2P+E 10 A 250 V~ Australian standard												•

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Shaver supply units



09290
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs - 3 modules.
Depth: 42 mm



09290.CM
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs - 3 modules.
Depth: 42 mm

SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)



09203.R
Epresa 16 A
P17/11, red.
Depth: 23,2 mm



09210.R
16 A, universal,
red - 2 modules.
Depth: 26,4 mm



09208.A
16 A, German,
orange - 2 modules.
Depth: 29,5 mm



09208.R
16 A, German,
red - 2 modules.
Depth: 29,5 mm



09208.V
16 A, German,
green - 2 modules.
Depth: 29,5 mm



09240.R
16 A, Israeli,
red - 2 modules.
Depth: 29,7 mm

° Lamps and signalling units, page 49

Socket outlets • Signal reception socket outlets

White	Carbon Matt
USB supply unit	
<p>09292 5 V 1,5 A, 1 USB-A, 120-240 V~ 50/60 Hz. Depth: 37 mm</p>	<p>09292.CM 5 V 1,5 A, 1 USB-A, 120-240 V~ 50/60 Hz. Depth: 37 mm</p>
<p>09292.C 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm</p>	<p>09292.C.CM 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 37 mm</p>
Special socket outlets	
<p>09330 2P 6 A 24 V (SELV), for 01620 plug. Depth: 25 mm</p>	<p>09330.CM 2P 6 A 24 V (SELV), for 01620 plug. Depth: 25 mm</p>
Phone socket outlets	
<p>09320 RJ11, 6-position 4-contact (6/4). Depth: 33,6 mm</p>	<p>09320.CM RJ11, 6-position 4-contact (6/4). Depth: 33,6 mm</p>
<p>09324 Israeli stan- dard, screw terminals. Depth: 33,4 mm</p>	<p>09324.CM Israeli stan- dard, screw terminals. Depth: 33,4 mm</p>
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output Ø 9,5 mm male and F-type female)	
<p>09300.01 Male, single connection 1 dB. Depth: 26,1 mm</p>	<p>09300.01.CM Male, single connection 1 dB. Depth: 26,1 mm</p>
<p>09300.10 Male, through-line 10 dB. Depth: 26,1 mm</p>	<p>09300.10.CM Male, through-line 10 dB. Depth: 26,1 mm</p>
<p>09302.01 Demix, male and F-type, single connection 1 dB - 2 modules. Depth: 22,1 mm</p>	<p>09302.01.CM Demix, male and F-type, single connection 1 dB - 2 modules. Depth: 22,1 mm</p>
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (3 outputs: Ø 9,5 mm male and female + F-type)	
<p>09303 Single connection 1 dB - 2 modules. Depth: 22 mm</p>	<p>09303.CM Single connection 1 dB - 2 modules. Depth: 22 mm</p>
Coaxial TV 40-862 MHz socket outlets (1 output: Ø 9,5 mm female) and F-type socket outlets	
<p>*09313 Single connection. Depth: 29 mm</p>	<p>*09313.CM Single connection. Depth: 29 mm</p>
<p>09318 With F-type female connector. Depth: 9 mm</p>	<p>09318.CM With F-type female connector. Depth: 9 mm</p>

Signal reception socket • Signalling

White	Carbon Matt
Terminal resistors and coaxial TV-RD-SAT 2400 MHz connectors	
<p>16330 Z 75 Ω, for frequencies up to 2400 MHz</p>	<p>01644 Male, axial cable entry</p>
<p>01645 Female, axial cable entry</p>	<p>01634 Male, 90°-cable entry</p>
<p>01635 Female, 90°-cable entry</p>	<p>01654 Male, F-type, for RG59 cable</p>
RJ45 data ports	
<p>09338.9 Netsafe, Cat. 5e, UTP. Depth: 26 mm</p>	<p>09338.9.CM Netsafe, Cat. 5e, UTP. Depth: 26 mm</p>
<p>09339.6 Netsafe, Cat. 6, UTP 110. Depth: 34,2 mm</p>	<p>09339.6.CM Netsafe, Cat. 6, UTP 110. Depth: 34,2 mm</p>
<p>09339.14 Netsafe, Cat. 6, FTP. Depth: 39,7 mm</p>	<p>09339.14.CM Netsafe, Cat. 6, FTP. Depth: 39,7 mm</p>
<p>09339.16 Netsafe, Cat. 6a, FTP. Depth: 39,7 mm</p>	<p>09339.16.CM Netsafe, Cat. 6a, FTP. Depth: 39,7 mm</p>
<p>09338.C Adaptor, RJ45 Cat. 5/6 AMP, Lucent T. Depth: 9 mm</p>	<p>09338.C.CM Adaptor, RJ45 Cat. 5/6 AMP, Lucent T. Depth: 9 mm</p>
Electromechanical bells	
<p>09373 230 V~ 50/60 Hz. Depth: 32,5 mm</p>	<p>09373.CM 230 V~ 50/60 Hz. Depth: 32,5 mm</p>
Buzzers	
<p>09377 120 V~ 50/60 Hz. Depth: 31,2 mm</p>	<p>09377.CM 120 V~ 50/60 Hz. Depth: 31,2 mm</p>
<p>09378 230 V~ 50/60 Hz. Depth: 31,2 mm</p>	<p>09378.CM 230 V~ 50/60 Hz. Depth: 31,2 mm</p>
TORCIA, electronic hand-lamps (with automatic emergency device)	
<p>09395 With high-efficiency LED, 230 V~ 50/60 Hz - 2 modules. Depth: 41,3 mm</p>	<p>09395.CM With high-efficiency LED, 230 V~ 50/60 Hz - 2 modules. Depth: 41,3 mm</p>
<p>00910 Ni-MH 4,8 V 80 mAh battery, spare part for TORCIA</p>	

White Carbon Matt

Thermostats and timer-thermostats (heating and air-conditioning)



09470
Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, heating and air-conditioning ON/OFF, class I temperature control device (contribution 1%) in ON/OFF mode, white LED backlighting and brightness regulation, 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm



09470.CM
Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, heating and air-conditioning ON/OFF, class I temperature control device (contribution 1%) in ON/OFF mode, white LED backlighting and brightness regulation, 100-240 V 50/60 Hz - 2 modules. Depth: 28,5 mm



02900.1
Electronic thermostat for ON/OFF ambient temperature control (heating and air-conditioning), class I temperature control device (contribution 1%), change-over relay output 5(2) A 240 V~, AA LR6 1,5 V battery-powered (not supplied), surface mounting, white



01910
Electronic timer-thermostat for ON/OFF ambient temperature control (heating and air-conditioning), daily/weekly programming, class I temperature control device (contribution 1%), change-over relay output 5(2) A 250 V~, AA LR6 1,5 V battery-powered (not supplied), surface mounting, white

Hotel solutions



09026.DND
1-module interchangeable button, Do Not Disturb, with diffuser, lightable



09026.PLS
1-module interchangeable button, Please Clean, with diffuser, lightable



09026.DND.CM
1-module interchangeable button, Do Not Disturb, with diffuser, lightable



09026.PLS.CM
1-module interchangeable button, Please Clean, with diffuser, lightable



09097
1P NO 10 A 230 V~ push button, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules. Depth: 27,2 mm



***09257**
2P+E 13 A 250 V~ SICURY socket outlet, multistandard - 2 modules. Depth: 18,7 mm



09290
Shaver supply unit with 20 VA isolating transformer, 230 V~ 50/60 Hz, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm



***09257.CM**
2P+E 13 A 250 V~ SICURY socket outlet, multistandard - 2 modules. Depth: 18,7 mm



09290.CM
Shaver supply unit with 20 VA isolating transformer, 230 V~ 50/60 Hz, 230 V~ and 120 V~ outputs - 3 modules. Depth: 42 mm



09463
Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,7 mm



09465
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm



09463.CM
Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 24,7 mm



09465.CM
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm

White Carbon Matt

Smart home View Wireless - Connected devices

Bluetooth

WiFi



0K14597.01
Wi-Fi Bluetooth wireless technology gateway for integration, configuration and supervising of View Wireless system by Cloud and app for smartphone and tablet, supply voltage 100-240 V 50/60 Hz, on DIN (60715 TH35) rail installation, occupies 2 17,5 mm modules

Gateway installed into the supplied frame for DIN rail



03982
Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0



03981
Control device with NO 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0



09473
Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, IoT technology on Bluetooth® wireless technology 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm



09473.CM
Rotary dial thermostat for ambient temperature control, 5(2) A 240 V~ relay output, IoT technology on Bluetooth® wireless technology 5.0 for mesh View Wireless system realization, 1 input for outer temperature sensor, heating and air-conditioning ON/OFF and PID, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting and brightness regulation, supply voltage 100-240 V~ 50/60 Hz - 2 modules. Depth: 28,5 mm

LED signalling units




12-24 V~ - 0,1 W
0935.A: amber
0935.G: green
0935.R: red
0935.B: blue
0935.W: white

250 V~ 50/60 Hz - 0,35 W
00936.250.A: amber
00936.250.G: green
00936.250.R: red
00936.250.B: blue
00936.250.W: white

120 V~ 50/60 Hz - 0,2 W
00936.120.A: amber
00936.120.G: green
00936.120.R: red
00936.120.B: blue
00936.120.W: white


Accessories for floor mounting

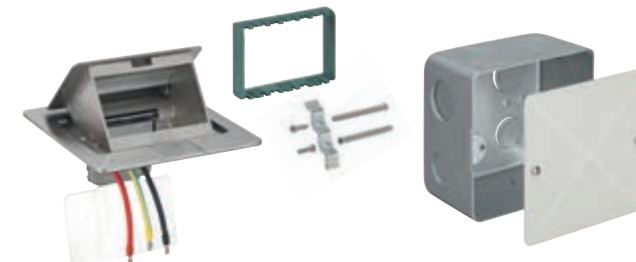


V54303
Floor mount turret for Neve Up devices installation in V54903 box. Supplied with 3-module mounting frame

V54903
Flush box for floor mount turret V54303

Glossy
(Technopolymer)

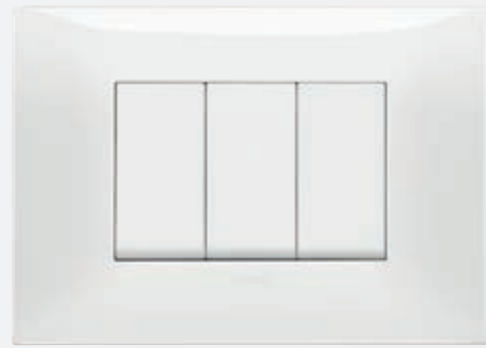

01 White (Total Look)

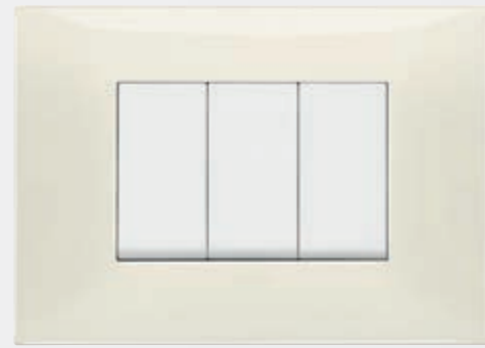

02 Ivory




03 Slate grey



04 Black


Matt
(Matt painted technopolymer)

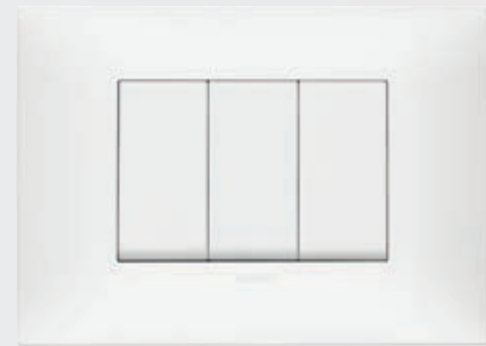


11 Matt white



12 Matt dove grey

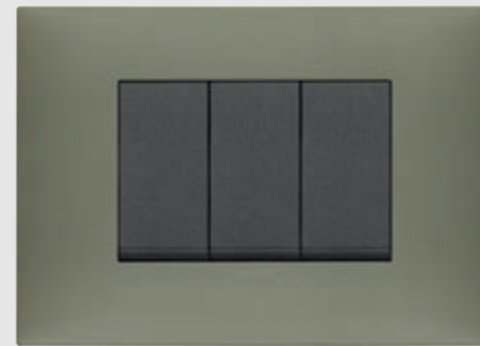


13 Matt clay

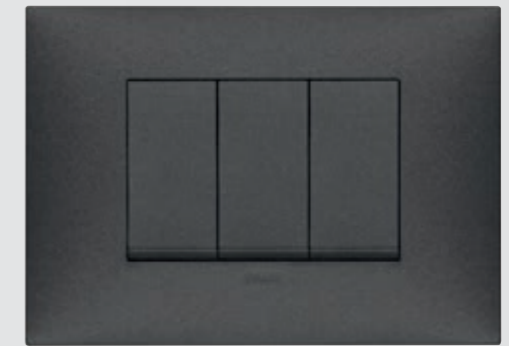

14 Carbon matt (Total Look)

Metal
(Metallic painted technopolymer)

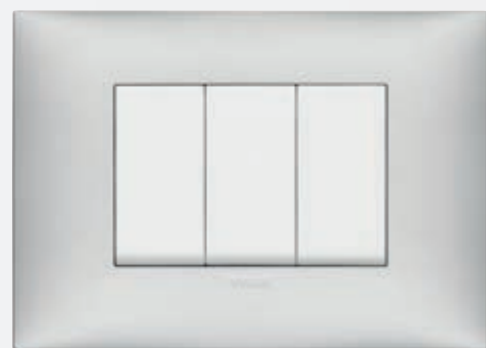

21 Matt silver



22 Matt nickel



23 Matt titanium



24 Matt copper

NEVE UP

Cover plates: guideline



	1-central-module	2-module	1-central-module	2-separate-module	2-central-module	3-module
Glossy (Technopolymer)						
White (Total Look)	09661.01	09662.01	09671.01	09679.01	09672.01	09673.01
Ivory	09661.02	09662.02	09671.02	09679.02	09672.02	09673.02
Slate grey	09661.03	09662.03	09671.03	09679.03	09672.03	09673.03
Black	09661.04	09662.04	09671.04	09679.04	09672.04	09673.04
Matt (Matt painted technopolymer)						
Matt white	09661.11	09662.11	09671.11	09679.11	09672.11	09673.11
Matt dove grey	09661.12	09662.12	09671.12	09679.12	09672.12	09673.12
Matt clay	09661.13	09662.13	09671.13	09679.13	09672.13	09673.13
Carbon matt (Total Look)	09661.14	09662.14	09671.14	09679.14	09672.14	09673.14
Metal (Metallic painted technopolymer)						
Matt silver	09661.21	09662.21	09671.21	09679.21	09672.21	09673.21
Matt nickel	09661.22	09662.22	09671.22	09679.22	09672.22	09673.22
Matt titanium	09661.23	09662.23	09671.23	09679.23	09672.23	09673.23
Matt copper	09661.24	09662.24	09671.24	09679.24	09672.24	09673.24

NEVE UP

Cover plates: guideline



	3-blank-module	4-module	7-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
09670.01		09674.01	09677.01	09664.01	09666.01	09668.01
09670.02		09674.02	09677.02	09664.02	09666.02	09668.02
09670.03		09674.03	09677.03	09664.03	09666.03	09668.03
09670.04		09674.04	09677.04	09664.04	09666.04	09668.04
09670.11		09674.11	09677.11	09664.11	09666.11	09668.11
09670.12		09674.12	09677.12	09664.12	09666.12	09668.12
09670.13		09674.13	09677.13	09664.13	09666.13	09668.13
09670.14		09674.14	09677.14	09664.14	09666.14	09668.14
09670.21		09674.21	09677.21	09664.21	09666.21	09668.21
09670.22		09674.22	09677.22	09664.22	09666.22	09668.22
09670.23		09674.23	09677.23	09664.23	09666.23	09668.23
09670.24		09674.24	09677.24	09664.24	09666.24	09668.24

NEVE UP
Types of mounting



Module	Box	Frame	Cover plate*
2-central for ø 60 mm and 3-module mounting box	<p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p>	<p>09606 2-central module, for horizontal installation</p>	<p>09672... 2-central-module, for horizontal and vertical installation. Dimensions: 120x86x8,5 mm</p>
	<p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>		
	<p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p>		
	<p>V71703 For hollow walls, GW 850 °C, light blue</p>	<p>09607 2-central module, for vertical installation</p>	<p>09672... 2-central-module, for horizontal and vertical installation. Dimensions: 120x86x8,5 mm</p>
	<p>4x2" mounting box</p>		
3	<p>4x2" mounting box</p>	<p>09613 3-module</p>	<p>09671... 1-central-module. Dimensions: 120x86x8,9 mm</p>
	<p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p>	<p>V71703 For hollow walls, GW 850 °C, light blue</p>	<p>09623 3-module, to use for installation of Plana devices</p>

NEVE UP
Types of mounting






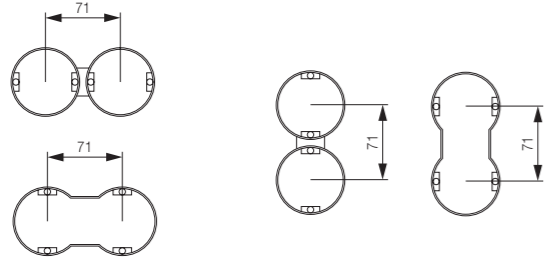
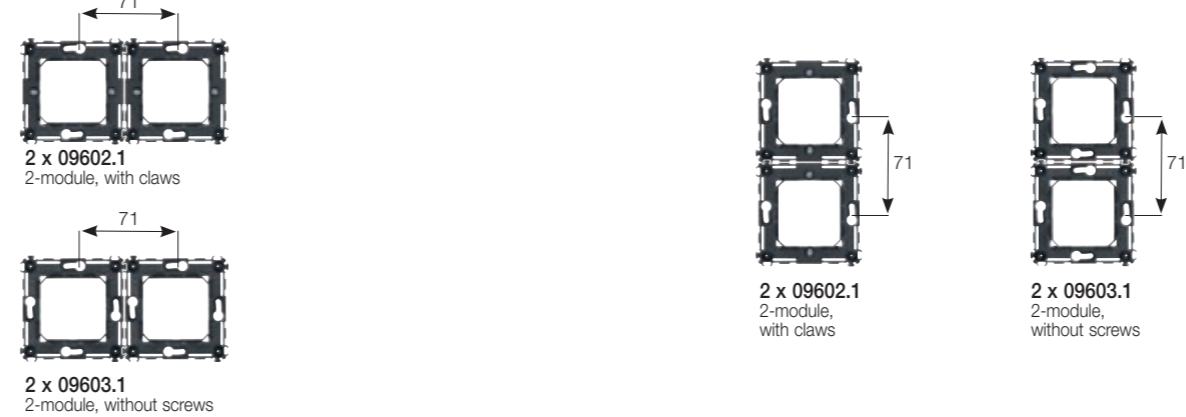

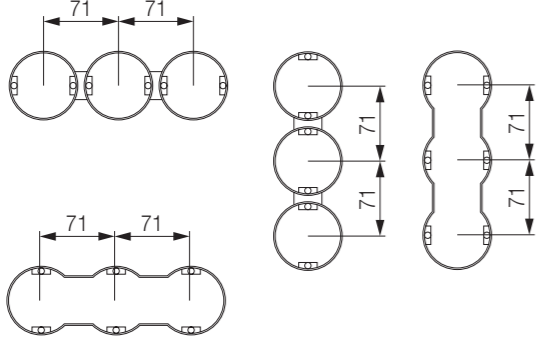
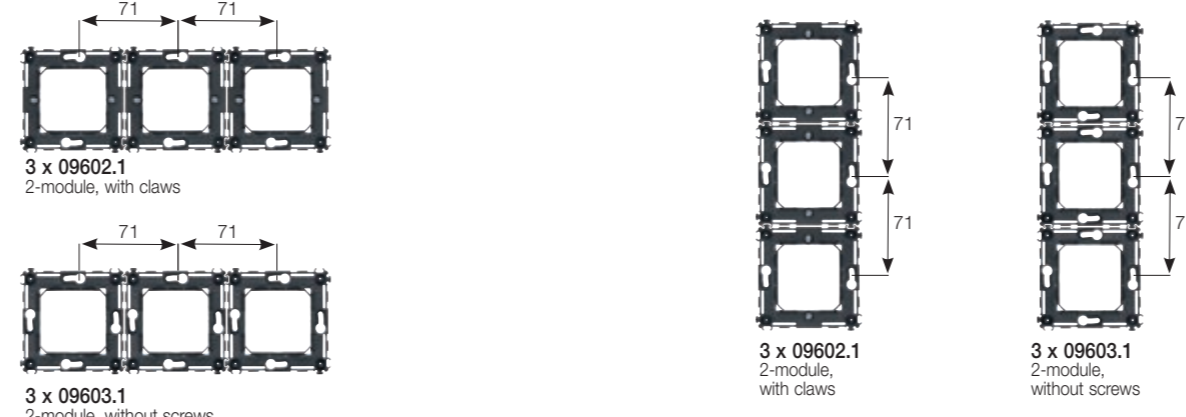
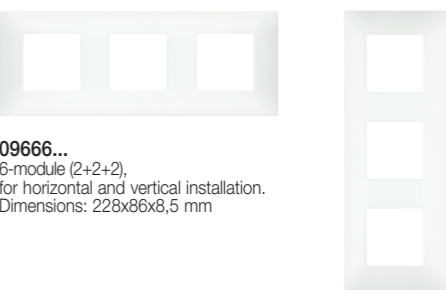
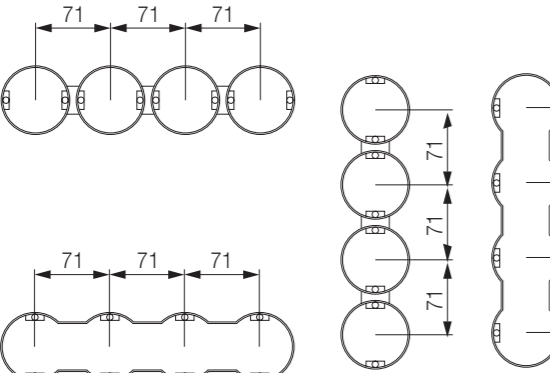
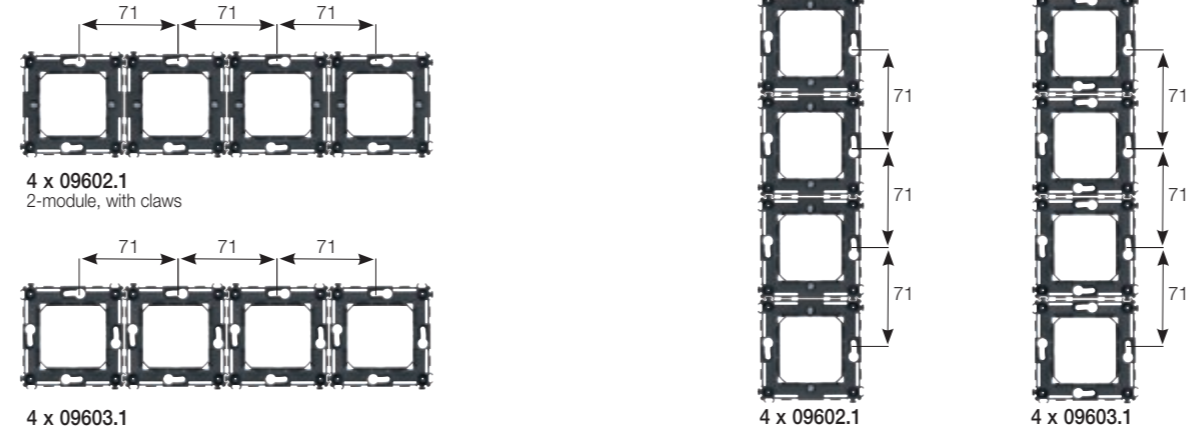



Module	Box	Frame	Cover plate*	
3	<p>4x2" mounting box</p>	<p>09613 3-module</p>	<p>09673... 3-module. Dimensions: 120x86x8,5 mm</p>	
	<p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p>	<p>V71703 For hollow walls, GW 850 °C, light blue</p>	<p>09623 3-module, to use for installation of Plana devices</p>	<p>09670... Blank module. Dimensions: 120x86x9,8 mm</p>
4	<p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p>	<p>V71704 For hollow walls, GW 850 °C, light blue</p>	<p>09614 4-module</p>	<p>09674... 4-module. Dimensions: 142,4x86x8,4 mm</p>
7	<p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p>	<p>V71706 For hollow walls, GW 850 °C, light blue</p>	<p>09617 7-module</p>	<p>09677... 7-module. Dimensions: 210x86x8,4 mm</p>

* Cover plates range, page 52

71 mm between centres installation


71 mm between centres installation

Module	Box	Frame	Cover plate*
1 for \varnothing 60 mm mounting box	 <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p>09602.1 2-module, with claws</p> <p>09603.1 2-module, without screws</p>	 <p>09661... 1-central-module. Dimensions: 86x86x8,8 mm</p>
2 for \varnothing 60 mm mounting box		 <p>09602.1 2-module, with claws</p> <p>09603.1 2-module, without screws</p>	 <p>09662... 2-module. Dimensions: 86x86x8,5 mm</p>
2+2 71 mm between centres		 <p>2 x 09602.1 2-module, with claws</p> <p>2 x 09603.1 2-module, without screws</p> <p>2 x 09602.1 2-module, with claws</p> <p>2 x 09603.1 2-module, without screws</p>	 <p>09664... 4-module (2+2), for horizontal and vertical installation. Dimensions: 157x86x8,5 mm</p>
2+2+2 71 mm between centres		 <p>3 x 09602.1 2-module, with claws</p> <p>3 x 09603.1 2-module, without screws</p> <p>3 x 09602.1 2-module, with claws</p> <p>3 x 09603.1 2-module, without screws</p>	 <p>09666... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 228x86x8,5 mm</p>
2+2+2+2 71 mm between centres		 <p>4 x 09602.1 2-module, with claws</p> <p>4 x 09603.1 2-module, without screws</p> <p>4 x 09602.1 2-module, with claws</p> <p>4 x 09603.1 2-module, without screws</p>	 <p>09668... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 299x86x8,5 mm</p>

Cover plates and controls customisation

Cover plates: customisation positions

(see area in grey)



Example of customised cover plate



Controls and buttons: positions and features

Type	Customisation position*	Backlit customisation	Not backlit customisation
1-module controls and interchangeable buttons		NO	NO
Lightable 1-module controls and interchangeable buttons 09021.N and 09021.N.CM		NO	positions 1 and 2
Lightable 1-module controls and interchangeable buttons 09021.G and 09021.G.CM		position 3	positions 1 and 2
2-module controls and interchangeable buttons		NO	NO
Lightable 2-module controls and interchangeable buttons 09022.N and 09022.N.CM		NO	positions 1, 2 and 3

Example of customised controls and buttons



Neve Up - White: backlighting controls and interchangeable buttons



Neve Up - Carbon matt: backlighting controls and interchangeable buttons

* when position is not indicated, the customization is possible in the whole area of the button/control

Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- if the required customisation is including in the 'Library of standard symbols and wording', indicate the item code + symbol/wording code, **if the customisation is not included in the table check its feasibility with the sales network.**
- the **visible in darkness** customization is possible only in symbol engraved buttons and with diffuser (e.g. 09021.G and 09021.G.CM).

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed

- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Library of standard symbols and wording (♦ symbols already on product catalogue visible in darkness)

ACCESSES														
LIGHTING														
ROLLER SHUTTERS														
CLIMATE						IRRIGATION								
SCENARIOS														
MUSIC AND AUDIO														
NUMBERS AND TEXTS														
HOTEL														

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.





Beauty. Energy. Life

Since 1945 our energy is driven by passion and are engaged in supporting the evolution of living styles. The heart of our company, where we create, design, manufacture and test all our products, is in the North East of Italy.

We continue manufacturing here at Marostica: from materials to shapes, colour combinations to electronic processes, we are distinguished by quality, style and technology that speak our language all over the world. A long tradition and history of success, a culture based on solid and true values.

Research. Technology. Simplicity

To ensure the best of technology and design, 6% of our annual turnover is invested in R&D. This has allowed us over the years to lodge more than 180 patents worldwide, reflecting the attention of the great innovation like the little details that make every day life more simple and comfortable. We firmly believe that new ideas are created to be shared.


Taking care of the process

Our manufacturing cycle is characterized by low environmental impact. We recycle 60% of the plastic material waste and most of the metal. We only use water-based paints or UV curing. We are replacing the electroplating bath with the innovative and more environmentally friendly MSD process that eliminates any type of harmful emissions.



SICURY patent

On 15 March 1968 we patented our idea for the SICURY shutter, an essential device for ensuring the safety of electrical systems and protecting sockets, by preventing users from making involuntary contact with live parts. And since we firmly believe that new ideas are created to be shared, we decided to grant all the operators in the industry the right to use our patent free of charge, making SICURY a market standard that has been making the lives of children and their parents a little safer for the past 50 years.

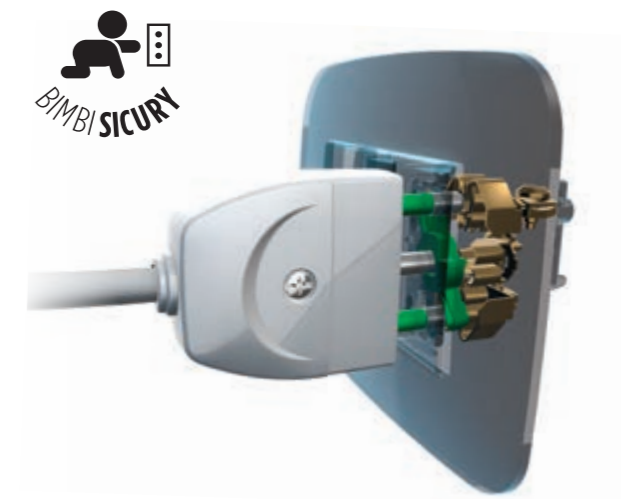

Energia Positiva. Insieme

